

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representation of
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : C08J 5/22, 7/16, C08F 291/00, H01M 8/10</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/24497</p> <p>(43) International Publication Date: 20 May 1999 (20.05.99)</p>																								
<p>(21) International Application Number: PCT/CA98/01041</p> <p>(22) International Filing Date: 12 November 1998 (12.11.98)</p> <p>(30) Priority Data: 08/967,960 12 November 1997 (12.11.97) US</p> <p>(71) Applicant (for all designated States except US): BALLARD POWER SYSTEMS INC. [CA/CA]; 9000 Glenlyon Parkway, Burnaby, British Columbia V5J 5J9 (CA).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): STONE, Charles [CA/CA]; 1088 Quebec Street #701, Vancouver, British Columbia V6A 4H2 (CA). STECK, Alfred, E. [CA/CA]; 3956 Westridge Avenue, West Vancouver, British Columbia V7V 3H7 (CA).</p> <p>(74) Agent: DE KOCK, Elbie, R.; Russell Reyneke, Two Bentall Centre, Suite 700, 555 Burrard Street, Vancouver, British Columbia V7X 1M8 (CA).</p>		<p>(81) Designated States: AU, CA, DE, GB, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>																								
<p>(54) Title: GRAFT POLYMERIC MEMBRANES AND ION-EXCHANGE MEMBRANES FORMED THEREFROM</p> <div data-bbox="332 1155 1218 1680"> <table border="1"> <caption>Estimated data points from the graph</caption> <thead> <tr> <th>Current Density (mA/cm²)</th> <th>Voltage (V) - Curve A</th> <th>Voltage (V) - Curve B</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1.05</td> <td>1.00</td> </tr> <tr> <td>100</td> <td>0.90</td> <td>0.80</td> </tr> <tr> <td>200</td> <td>0.75</td> <td>0.65</td> </tr> <tr> <td>300</td> <td>0.65</td> <td>0.55</td> </tr> <tr> <td>400</td> <td>0.55</td> <td>0.45</td> </tr> <tr> <td>500</td> <td>0.45</td> <td>-</td> </tr> <tr> <td>600</td> <td>0.35</td> <td>-</td> </tr> </tbody> </table> </div> <p>(57) Abstract</p> <p>Graft polymeric membranes in which one or more trifluorovinyl aromatic monomers are radiation graft polymerized to a preformed polymeric base film are provided, as well as ion-exchange membranes prepared therefrom. Preferred monomers include substituted α, β, β'-trifluorostyrenes and trifluorovinyl naphthalenes which are activated towards the grafting reaction or facilitate the introduction of more than one ion-exchange group per monomer unit in the grafted chains. The ion-exchange membranes are useful in dialysis applications, and particularly in electrochemical applications, for example as membrane electrolytes in electrochemical fuel cells and electrolyzers.</p>			Current Density (mA/cm²)	Voltage (V) - Curve A	Voltage (V) - Curve B	0	1.05	1.00	100	0.90	0.80	200	0.75	0.65	300	0.65	0.55	400	0.55	0.45	500	0.45	-	600	0.35	-
Current Density (mA/cm²)	Voltage (V) - Curve A	Voltage (V) - Curve B																								
0	1.05	1.00																								
100	0.90	0.80																								
200	0.75	0.65																								
300	0.65	0.55																								
400	0.55	0.45																								
500	0.45	-																								
600	0.35	-																								

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

GRAFT POLYMERIC MEMBRANES AND
ION-EXCHANGE MEMBRANES FORMED THEREFROM

Field Of The Invention

The present invention relates to graft
polymeric membranes in which one or more
trifluorovinyl aromatic monomers are radiation
5 graft polymerized to a preformed polymeric base
film. Where the grafted polymeric chains are
modified to incorporate ion-exchange groups, the
resultant membranes are useful in dialysis
applications, and particularly in electrochemical
10 applications, for example as membrane electrolytes
in electrochemical fuel cells and electrolyzers.

Background Of The Invention

The preparation of graft polymeric membranes
15 by radiation grafting of a monomer to a polymeric
base film has been demonstrated for various
combinations of monomers and base films. The
grafting of styrene to a polymeric base film, and
subsequent sulfonation of the grafted polystyrene
20 chains has been used to prepare ion-exchange
membranes.

U.S. Patent No. 4,012,303, reports the
radiation grafting of α,β,β -trifluorostyrene (TFS)
to polymeric base films using gamma co-
25 irradiation, followed by the introduction of
various ion-exchange substituents to the pendant
aromatic rings of the grafted chains. With co-
irradiation, since the TFS monomer is
simultaneously irradiated, undesirable processes
30 such as monomer dimerization and/or independent

homopolymerization of the monomer may occur in competition with the desired graft polymerization reaction.

U.S. Patent No. 4,012,303 also reports that the TFS monomer may be first sulfonated and then grafted to the base film. Thus, the introduction of ion-exchange groups into the membrane can be done as part of the grafting process, or in a second step.

More recently, the grafting of TFS to pre-irradiated polymeric base films, followed by the introduction of various substituents to the pendant aromatic rings of the grafted chain has been reported in U.S. Patent No. 4,605,685. Solid or porous polymeric base films, such as for example polyethylene and polytetrafluoroethylene, are pre-irradiated and then contacted with TFS neat or in solution. Pre-irradiation is reportedly a more economic and efficient grafting technique, reportedly giving a percentage graft of 10-50% in reaction times of 1-50 hours. Aromatic sulfonation, haloalkylation, amination, hydroxylation, carboxylation, phosphonation and phosphorylation are among the reactions subsequently used to introduce ion-exchange groups into the grafted polymeric chains. Post-sulfonation rates of 40% to 100% are reported.

In either case the prior art TFS-based grafted membranes incorporate a maximum of one functional group per monomer unit in the grafted chain. Further, they typically incorporate only one type of functional group as substituents on the pendant aromatic rings in the grafted chains.


In the present invention, one or more types of substituted TFS monomers are grafted to

polymeric base films, the substituents being selected to offer particular advantages, for example:

- 5 (a) substituted TFS monomers which are activated by virtue of their aromatic substituents have increased reactivity in the grafting reaction facilitating grafting and/or are activated in subsequent reactions to introduce ion-exchange functionality into the grafted
10 chains;
 - (b) grafted chains comprising monomer units with more than one aromatic ring permit the introduction of more than one ion-exchange group per grafted monomer unit, enabling the
15 achievement of higher ion-exchange capacities at lower percentage grafts than in prior art grafted polymeric membranes;
 - (c) substituted TFS monomers in which the substituents are precursors to ion-exchange
20 groups may be transformed to ion-exchange groups after the grafting reaction, and can facilitate the introduction of more than one type of ion-exchange group into the grafted chains, for example, so that both cation and
25 anion exchange groups may be incorporated in a membrane.
- Other trifluorovinyl aromatic or heteroaromatic monomers offering one or more of the above described advantages similarly may be
30 grafted to polymeric base films to give novel graft polymeric membranes.

Summary Of The Invention

Graft polymeric membranes comprise one or more trifluorovinyl aromatic monomers radiation graft polymerized to a preformed polymeric base film. In a first embodiment, a graft polymeric membrane comprises a preformed polymeric base film to which has been graft polymerized a substituted α,β,β -trifluorostyrene monomer selected from the group consisting of monomers of formula (I):



(I)

15

The group A may be OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl), which are substituents that activate the monomer.

20

The monomer of formula (I) may have more than one aromatic ring, for example when A is Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl), $(\text{CH}_2)_n\text{Ph}$ or $(\text{CF}_2)_n\text{Ph}$ (where n is an integer greater than zero). Of these, the groups Ph, OPh, SPh, N(R)Ph are particularly preferred.


25

Other substituents, A, which are useful precursors to ion-exchange groups can be advantageously selected, for example, SO_2X (where X is selected from the group consisting of F, Cl, Br, I), OH, NH_2 , CN, and NO_2 .

30

In a second embodiment, a graft polymeric membrane comprises a preformed polymeric base film to which has been graft polymerized a

trifluorovinyl naphthalene monomer selected from the group consisting of monomers of formula (II):

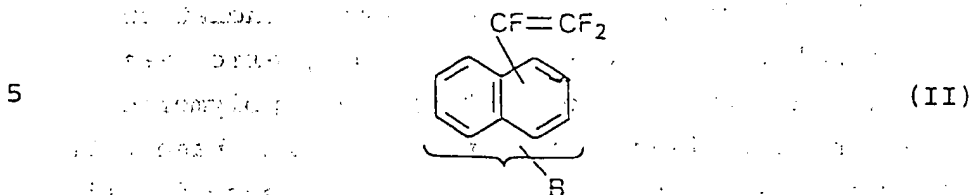

10 B may be hydrogen, or may be selected from the preferred substituents described above for A in formula (I).


15 These and other trifluorovinyl polyaromatic and heteroaromatic monomers may be advantageously graft polymerized to polymeric base films, as such monomer units provide more sites for subsequent introduction of functional groups, and in many cases, the aromatic rings are electron rich and activated compared to that of TFS.

20 In any of the embodiments described above, the preformed polymeric base film may be grafted with a single monomer whereby the grafted chains are homopolymeric. Alternatively, the preformed polymeric base film may be grafted with a mixture of monomers to give grafted chains which are

25 copolymeric. The monomer mixture may comprise, or may consist predominantly of, one or more monomers described by the formulae. In some embodiments the mixture may consist of monomers described by the formulae.

30 Preferred vinyl monomers for co-grafting with those described by the formulae include styrene and ethylene-based monomers, fluorinated ethylene-based monomers, and other α,β,β -trifluorostyrene monomers. For example, one or more monomers of

formula (III) may be included in the mixture:




(III)

where D is selected from the group consisting of hydrogen, halomethyl, perfluoroalkyl, perfluoroalkenyl and fluorine and SO_3M^+ , the latter representing a sulfonic acid salt where M^+ is a counterion.

Depending on the nature of the monomers incorporated into the grafted chains of the membranes described above, ion-exchange groups may be introduced by the transformation of precursor groups already present as aromatic substituents in the monomers, and/or via post-graft reaction processes. For example, the membranes may be subjected to a reaction process selected from the group consisting of sulfonation, phosphonation, phosphorylation, amination, carboxylation, hydroxylation and nitration whereby ion-exchange groups are introduced into pendant aromatic rings of the grafted chains, directly by these reaction processes or via these reaction processes in combination with subsequent steps.

In one embodiment, an ion-exchange membrane comprises a preformed polymeric base film with grafted chains comprising monomer units of formula (IV):




(IV)

where A is OH, OR, SR or NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl) and at least a portion of the monomer units include at least one ion-exchange substituent on the aromatic ring thereof. In preferred embodiments at least a portion of the monomer units include at least two ion-exchange substituents, which may be the same or different from each other, on the aromatic ring thereof. If at least two ion-exchange substituents are present on the ring, A may also be hydrogen. In a particularly preferred embodiment, A is selected from the group consisting of OR (where R is selected from the group consisting of alkyl and fluoroalkyl) and at least a portion of the monomer units include two SO₃H substituents on the aromatic ring thereof.

In another embodiment, an ion-exchange membrane comprises a preformed polymeric base film with grafted chains comprising monomer units of formula (IV) where A is (CH₂)_nPh and (CF₂)_nPh (where n is an integer greater than zero) or more preferably Ph, OPh, SPh or N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl) and at least a portion of the monomer units include at least one ion-exchange substituent on an aromatic ring thereof. In preferred embodiments at least a portion of the monomer units include at least two ion-exchange substituents which may be the same or different from each other. These monomer units have more than one aromatic ring and therefore facilitate the introduction of more than one ion-exchange group per monomer unit. In a particularly preferred embodiment A is OPh and at least a portion of the

monomer units include two SO_3H substituents.

In a still further embodiment, an ion-exchange membrane comprises a preformed polymeric base film with grafted chains comprising monomer units of formula (V):



(V)

10

B is selected from the group consisting of hydrogen, OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl), Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl), $(\text{CH}_2)_n\text{Ph}$ and $(\text{CF}_2)_n\text{Ph}$ (where n is an integer greater than zero), and at least a portion of the monomer units include at least one ion-exchange substituent on the naphthyl ring structure thereof. In preferred embodiments at least a portion of the monomer units include at least two ion-exchange substituents, which may be the same or different from each other, on the naphthyl ring structure thereof. These naphthyl monomer units facilitate the introduction of more than one ion-exchange group per monomer unit.


The preferred embodiments described above in which at least a portion of the monomer units include at least two ion-exchange substituents enable ion-exchange membranes wherein the grafted chains include an average of greater than one ion-exchange substituent per monomer unit in the grafted chains. In these particularly preferred

35


ion-exchange membranes, not every monomer unit in the grafted chains necessarily includes two or even one ion-exchange substituent, but because enough monomer units include two or more ion-exchange substituents, on average the monomer units in the chain include more than one ion-exchange substituent.

The ion-exchange membranes described above may include more than one different type of ion-exchange group in the grafted chains, for example it is possible to incorporate both anion- and cation-exchange groups. The different ion-exchange groups may be introduced in post-grafting reactions, however it is generally more convenient to introduce at least one of them via a precursor substituent present on one of the grafted polymerized monomers.

Another embodiment of an ion-exchange membrane comprises a preformed polymeric base film with grafted chains comprising a first monomer unit of formula (VI):

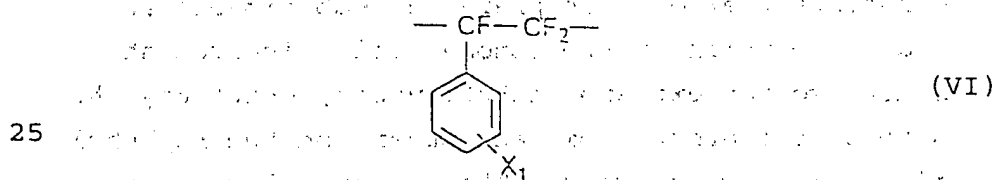

and a second monomer unit of formula (VII):

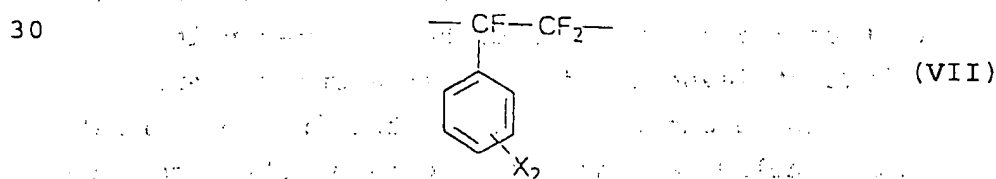

wherein X_1 and X_2 are different ion-exchange

groups. Again these substituents may be introduced via precursor groups present in the grafted monomers, or subsequently to the graft polymerization reaction.

- 5 In all the above embodiments of an ion-exchange membrane, preferred ion-exchange substituents or groups are SO_3H , PO_2H_2 , PO_3H_2 , $\text{CH}_2\text{PO}_3\text{H}_2$, COOH , OSO_3H , OPO_2H_2 , OPO_3H_2 , $\text{NRR}'\text{R}''$ and $\text{CH}_2\text{NRR}'\text{R}''$ (where R , R' and R'' are independently selected from the group consisting of hydrogen, alkyl, fluoroalkyl and aryl). The sulfonic acid substituent SO_3H is particularly preferred.

- 10 In any of the embodiments of an ion-exchange membrane described above, the grafted chains may be homopolymeric or may be copolymeric. Copolymeric grafted chains may comprise, or may consist predominantly of, one or more monomer units described by the formulae. In some 15 embodiments, copolymeric grafted chains may consist of a mixture of monomer units described by the formulae.

- The preformed polymeric film or substrate for the grafting reaction is preferably selected so 25 that it imparts mechanical strength to the membrane and will be physically and chemically stable to irradiation and under the conditions to which it is to be exposed in the end-use application for the membrane. Suitable materials 30 generally include homopolymers or copolymers of non-fluorinated, fluorinated and perfluorinated vinyl monomers. Fluorinated and perfluorinated polymers are preferred for certain applications due to their enhanced oxidative and thermal 35 stability. Suitable materials include, but are

not limited to, polyvinylidene fluoride, poly(tetrafluoroethylene-co-perfluorovinylether), poly(tetrafluoroethylene-co-hexafluoropropylene), poly(chlorotrifluoroethylene-co-ethylene),
5 polyethylene and polypropylene, and particularly poly(ethylene-co-tetrafluoroethylene) and polytetrafluoroethylene.

The polymeric base film may be porous or substantially gas impermeable. Porous base films
10 may be used where the resultant grafted membrane is not required to be gas impermeable, for example, in filtration applications. However, for most electrochemical applications it is preferable that the ion-exchange membranes, and therefore the
15 polymeric base film, be substantially gas impermeable, for example, for use in electrochemical fuel cells. In these or other applications, the ion-exchange membranes may be used in conjunction with one or more electrodes,
20 in some cases in a consolidated electrode apparatus or a membrane electrode assembly.

Even when the grafted chains have a high ion-exchange capacity, which in isolation would tend to render them more water-soluble, the presence of
25 the polymeric base film in the grafted membranes can reduce the water solubility of the membrane as a whole and increase dimensional stability on hydration/dehydration. This is an important advantage of these grafted ion-exchange membranes
30 in applications, such as fuel cells, where high ion-exchange capacity but water insolubility, dimensional stability and low water content are desirable properties. Also, some of the homopolymers and copolymers described herein as
35 grafted chains, would be unlikely to form

mechanically stable membranes in isolation. Once again the presence of the base film can impart desirable properties to the grafted membrane. Also, depending on the nature of the preformed polymeric base film and the functionality of the grafted chains, the grafted ion-exchange membranes may reduce reactant crossover in fuel cell applications, for example, in direct methanol fuel cells.

The properties of the grafted membranes may be modified through varying degrees of cross-linking of the grafted chains by known methods, such as thermolysis, photolysis, plasma treatment and electron beam irradiation processes or the use of crosslinking agents.

As used above the term fluoroalkyl means any partially fluorinated or perfluorinated alkyl group, and the term halomethyl means any partially or fully halogenated methyl group. The abbreviation Ph is used to represent a phenyl group.

Brief Description Of The Drawings

FIG. 1 is a plot of cell voltage as a function of current density (expressed in milliamperes per square centimeter) in an electrochemical fuel cell employing a sulfonated membrane of p-MeO-TFS grafted poly(ethylene-co-tetrafluoroethylene) (Tefzel®, trademark of DuPont) and operating on hydrogen-oxygen (plot A) and hydrogen-air (plot B).

FIG. 2 is a plot of cell voltage as a function of current density (expressed in milliamperes per square centimeter) in an liquid

feed direct methanol fuel cell, employing a sulfonated membrane of p-MeO-TFS grafted poly(ethylene-co-tetrafluoroethylene) (plot C), a Nafion® 112 (trademark of DuPont) membrane (plot D), and a Nafion® 117 (trademark of DuPont) membrane (plot E).

Detailed Description Of The Preferred Embodiments

Any radiation capable of introducing sufficient concentrations of free radical sites on the base polymeric film may be used in the preparation of the grafted polymeric membranes described herein. For example, the irradiation may be by gamma-rays, X-rays or electron beam. Electron beam irradiation is generally preferable as the process times are short and thus more suited to high volume production processes. The decay of the source and typically longer reaction times required with gamma radiation render it less suitable for high volume manufacturing processes.

The preformed polymeric base film may be pre-irradiated prior to bringing it into contact with the monomer or monomer mixture to be grafted or the substrate and monomer(s) may be irradiated together (co-irradiation).

In the grafting reaction, the polymeric base film is treated with the monomer(s) in the liquid phase, either as neat liquids or in a solution. It can be advantageous to select a solvent which will cause the solution to penetrate the base film and cause it to swell. This facilitates grafting of the monomer(s) throughout the membrane thickness. Preferably the irradiation and grafting process is carried out in an inert atmosphere.

5

invention."

10

Grafting of p-SO₂F-TFS to poly(ethylene-co-tetrafluoroethylene) (Tefzel®) Film

15

20

25

30

The above procedure was also performed using a 3 mil (approx. 75 μ m) thick, 7 inch x 7 inch (17.78 cm x 17.78 cm) piece of film, and gave a similar percentage graft.

5

EXAMPLE 2

Grafting of p-PhO-TFS to poly(ethylene-co-tetrafluoroethylene) (Tefzel®) Film and Sulfonation of the Grafted Membrane

10

a) A 2 mil (approx. 50 μ m) thick, 7 inch x 7 inch (17.78 cm x 17.78 cm) film of poly(ethylene-co-tetrafluoroethylene) (Tefzel®) was irradiated with a dose of 5.3 Mrad using a cobalt-60 gamma radiation source, in an inert atmosphere. The irradiated base film was kept at -30°C in inert atmosphere prior to use. The irradiated membrane was treated with a degassed solution of p-PhO-TFS (86.8 g) in toluene (86.8 g) in an inert atmosphere at 50°C for approximately 100 hours. The membrane was removed and washed with heptane and dried at 30°C. The percentage graft was 11%.

20

b) The grafted membrane was sulfonated by immersion in a solution of chlorosulfonic acid (60 mL) in 1,1,2,2-tetrachloroethane (140 mL) for 1.5 hours at 100°C. The resultant ion-exchange membrane was washed with water. The equivalent weight of the hydrolyzed membrane was 1490 g/mole, indicating incorporation of an average of approximately two sulfonic acid sites per monomer

25

30

unit in the grafted chains, with a water content of 11%.

EXAMPLE 3

- 5 Grafting of p-MeO-TFS to poly(ethylene-co-tetrafluoroethylene) (Tefzel®) Film and
 Sulfonation of the Grafted Membrane

 A 2 mil (approx. 50 μ m) thick, 7 inch x 7
10 inch (17.78 cm x 17.78 cm) film of poly(ethylene-co-tetrafluoroethylene) (Tefzel®) was irradiated, treated with a solution of p-MeO-TFS and sulfonated using a similar procedure to that described in Example 2. The resultant ion-
15 exchange membrane had an equivalent weight of 1101 g/mole.

EXAMPLE 4

- Use of Sulfonated p-MeO-TFS grafted poly(ethylene-co-tetrafluoroethylene) (Tefzel®) Membrane as an
20 Ion-exchange Membrane in a Fuel Cell

 The membrane prepared as described in Example 3 was bonded to two catalyzed carbon fiber paper
25 electrodes to form a membrane electrode assembly having a total platinum catalyst loading of 8 mg/cm². The membrane electrode assembly was tested in a Ballard Mark IV single cell fuel cell. The following operating conditions were used:

- 30 Temperature: 80°C
 Reactant inlet pressure:
 30 psig for oxidant and fuel

Reactant stoichiometries:

2.0 oxidant and 1.5 hydrogen.

FIG. 1 shows polarization plots of voltage as a function of current density for the sulfonated grafted membrane employed in a membrane electrode assembly in the electrochemical fuel cell operating on hydrogen-oxygen (plot A) and hydrogen-air (plot B).

10 EXAMPLE 5

Grafting of p-MeO-TFS to poly(ethylene-co-tetrafluoroethylene) Film and Sulfonation of the Grafted Membrane

15 A 2 mil (approx. 50 μm) thick 8.5 inch x 8.5 inch film of poly(ethylene-co-tetrafluoroethylene) film was irradiated with a dose of 3 Mrad using a high energy electron beam irradiation source, in an inert atmosphere. The irradiated base film was kept at -30°C in an inert atmosphere prior to use. The irradiated membrane was treated with neat, freshly distilled p-methoxy- α,β,β -trifluorostyrene (p-MeO-TFS) in an inert atmosphere at 50°C for 60 hours. The membrane was removed and washed with 25 toluene and then dichloromethane, and then dried under vacuum. The percentage graft was 48%.

The grafted membrane was sulfonated using a similar procedure to that described in Example 2.

30 The resultant ion-exchange membrane had an equivalent weight of 679 g/mole.

EXAMPLE 6

Use of Sulfonated p-MeO-TFS grafted poly(ethylene-co-tetrafluoroethylene) Membrane as an Ion-exchange Membrane in a Direct Methanol Fuel Cell

5

Three membrane electrode assemblies were prepared by bonding a pair of catalyzed carbon fiber paper electrodes to each of three different membranes. The three assemblies had similar, but not identical, electrode structures. In each case the active area was 49 cm², and a platinum black catalyst was used at the cathode and a platinum/ruthenium catalyst was used at the anode. In the first assembly, the membrane of Example 5, with a thickness of 50 microns and an equivalent weight of 679 g/mole was used. In the second assembly a Nafion® 112 membrane with a thickness of 50 microns and an equivalent weight of 1100 g/mole was used. The third assembly employed a Nafion® 117 membrane with a thickness of 175 microns and an equivalent weight of 1100 g/mole.

Each membrane electrode assembly was tested in a Ballard liquid feed direct methanol fuel cell (0.4M aqueous methanol as fuel, air as oxidant, operating temperature approximately 110°C and reactant pressure approximately 30 psig).

FIG. 2 shows polarization plots of voltage as a function of current density for the sulfonated grafted membrane (plot C), the Nafion® 112 membrane (plot D) and the Nafion® 117 membrane (plot E) employed in a membrane electrode assembly in the direct methanol fuel cell. The performance of the sulfonated grafted membrane is comparable with that of the Nafion® 112 membrane, and is

considerably better than that of the thicker Nafion® 117 membrane, especially at higher current densities.

The percentage of methanol crossover was determined for each operating cell at two different current densities, by gas chromatography analysis of carbon monoxide found in the cathode exhaust. The results are shown in Table 1:

10

Table 1

Membrane	Current Density	
	100 mA/cm ²	200 mA/cm ²
Grafted Membrane of Example 5	20%	2%
Nafion® 112	33%	21%
Nafion® 117	18%	2%


The values (which have not been corrected for carbon monoxide permeating through the membrane from anode to cathode) indicate that the sulfonated grafted membrane of Example 5 gave a considerably lower percentage of methanol crossover than a conventional Nafion® 112 membrane of substantially the same thickness. The percentage crossover values for the sulfonated grafted membrane were almost as low as for the much thicker Nafion® 117 membrane. Thus, in a liquid feed direct methanol fuel cell the sulfonated grafted membrane exhibited excellent

fuel cell performance combined with substantially reduced methanol crossover.

While particular elements, embodiments and applications of the present invention have been shown and described, it will be understood, of course, that the invention is not limited thereto since modifications may be made by those skilled in the art, particularly in light of the foregoing teachings. It is therefore contemplated by the appended claims to cover such modifications as incorporate those features which come within the spirit and scope of the invention.


What is claimed is:

1. A membrane comprising a preformed polymeric base film to which has been grafted polymerized a monomer selected from the group consisting of monomers of formula (I)



(I)

10 and formula (II)



(II)

where A and B are independently selected from the group consisting of:

20 OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl),

Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl), (CH₂)_nPh and (CF₂)_nPh (where n is
25 an integer greater than zero),

SO₂X (where X is selected from the group consisting of F, Cl, Br, I), OH, NH₂, CN, and NO₂,

30 and the group from which B is selected further consists of hydrogen.

2. A membrane according to claim 1 comprising a preformed polymeric base film to which has been graft polymerized a monomer of formula (I) wherein A is selected from the group consisting of OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl).

3. A membrane according to claim 1 comprising a preformed polymeric base film to which has been graft polymerized a monomer of formula (I) wherein A is selected from the group consisting of Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl).

4. A membrane according to claim 1 comprising a preformed polymeric base film to which has been graft polymerized a monomer of formula (II) wherein B is selected from the group consisting of hydrogen, OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl), Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl).

5. A membrane according to claim 1 comprising a preformed polymeric base film to which has been graft polymerized a single monomer whereby the grafted chains are homopolymeric.

6. A membrane according to claim 1 comprising a preformed polymeric base film to which has been graft polymerized more than one

5 monomer selected from the group consisting of monomers of formula (I) and formula (II), whereby said grafted chains are copolymeric.


7. A membrane according to claim 1 comprising a preformed polymeric base film to which has been graft polymerized a monomer of formula (III) with said monomer selected from the group consisting of monomers of formula (I) and formula (II):




where D is selected from the group consisting of hydrogen, halomethyl, perfluoroalkyl, perfluoroalkenyl and fluorine and SO₃M⁺.

8. A membrane according to claim 1 wherein at least a portion of the grafted chains are cross-linked.

9. A method of preparing a membrane comprising graft polymerizing to a preformed polymeric base film a monomer selected from the group consisting of monomers of formula (I)

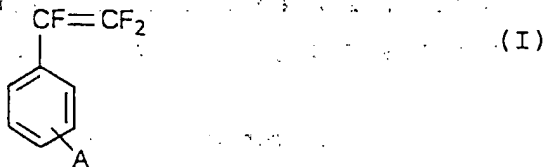

10 and formula (II)



(II)

15

where A and B are independently selected from the group consisting of:

OR, SR, NRR' (where R and R' are
20 independently selected from the group consisting of alkyl, fluoroalkyl and aryl),

Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl), (CH₂)_nPh and (CF₂)_nPh (where n is
25 an integer greater than zero),

SO₂X (where X is selected from the group consisting of F, Cl, Br, I), OH, NH₂, CN, and NO₂,


and the group from which B is selected
30 further consists of hydrogen.

10. A membrane prepared by subjecting a membrane of claim 1 to a reaction process selected from the group consisting of sulfonation, phosphonation, phosphorylation, amination,
5 carboxylation, hydroxylation and nitration.

11. An ion-exchange membrane comprising a preformed polymeric base film with grafted chains comprising monomer units selected from the group

consisting of monomer units of formula (IV)


5



(IV)

10

and formula (V)



(V)

15

where A and B are independently selected from the group consisting of

20

OH, OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl),

25

Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl), $(CH_2)_nPh$ and $(CF_2)_nPh$ (where n is an integer greater than zero),

and the group from which B is selected further consists of hydrogen,

30

wherein at least a portion of said monomer units comprise at least one ion-exchange substituent.

12. An ion-exchange membrane according to claim 11 wherein at least a portion of said monomer units comprise at least two ion-exchange substituents.

13. An ion-exchange membrane according to claim 11 wherein said grafted chains comprise an average of greater than one ion-exchange substituent per monomer unit in said grafted chains.
14. An ion-exchange membrane according to claim 11 wherein said grafted chains comprise at least two different types of ion-exchange groups.
15. An ion-exchange membrane according to claim 14 wherein said grafted chains comprise an anion exchange group and a cation exchange group.
16. An ion-exchange membrane according to claim 11 wherein at least a portion of the grafted chains are cross-linked.
17. An ion-exchange membrane according to claim 11 wherein said ion-exchange membrane is substantially gas impermeable.
18. An ion-exchange membrane according to claim 12 wherein said monomer units are of formula (IV) and the group from which A is selected from consists of hydrogen, OR, SR, NRR' (where R and R' are independently selected from the group consisting of alkyl, fluoroalkyl and aryl).
19. An ion-exchange membrane according to claim 18 wherein A is selected from the group consisting of OR (where R is selected from the group consisting of alkyl and fluoroalkyl) and at

- 5 least a portion of said monomer units comprise two SO_3H substituents.

20. An ion-exchange membrane according to claim 12 wherein said monomer units are of formula (IV) and the group from which A is selected from consists of Ph, OPh, SPh, N(R)Ph (where R is selected from the group consisting of hydrogen, Ph, alkyl and fluoroalkyl), $(\text{CH}_2)_n\text{Ph}$ and $(\text{CF}_2)_n\text{Ph}$ (where n is an integer greater than zero).

21. An ion-exchange membrane according to claim 20 wherein A is OPh, and at least a portion of said monomer units comprise two SO_3H substituents.

22. An ion-exchange membrane according to claim 12 wherein said monomer units are of formula (V).


23. An electrode apparatus comprising an ion-exchange membrane of claim 17.

24. A membrane electrode assembly comprising an ion-exchange membrane of claim 17.


25. An electrochemical fuel cell comprising an ion-exchange membrane of claim 17.

26. An electrochemical fuel cell according to claim 25 wherein said preformed polymeric base film is less than 50 μm thick.

27. An ion-exchange membrane comprising a preformed polymeric base film with grafted chains comprising a first monomer unit of formula (VI)

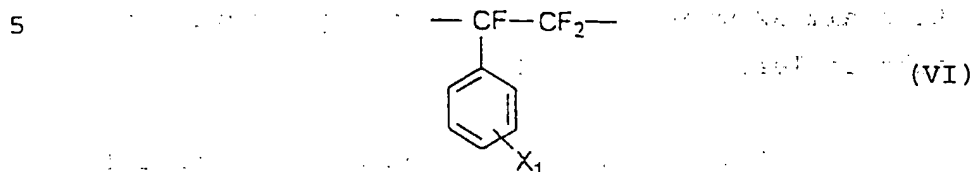

10 and a second monomer unit of formula (VII)

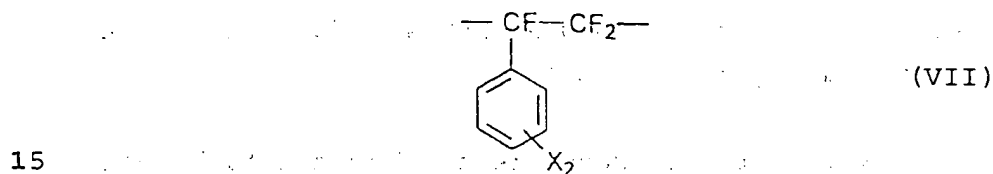

wherein X_1 and X_2 are different ion-exchange substituents.

28. An ion-exchange membrane according to claim 27 wherein at least a portion of the grafted chains are cross-linked.

29. An ion-exchange membrane according to claim 27 wherein said ion-exchange membrane is substantially gas impermeable.

30. An electrode apparatus comprising an ion-exchange membrane of claim 29.

31. A membrane electrode assembly comprising an ion-exchange membrane of claim 29.

32. An electrochemical fuel cell comprising an ion-exchange membrane of claim 29.

33. An electrochemical fuel cell according to claim 32 wherein said preformed polymeric base film is less than 50 μm thick.

34. A liquid feed electrochemical fuel cell comprising an ion-exchange membrane of claim 17.


35. A liquid feed electrochemical fuel cell according to claim 34 wherein said fuel cell is a direct methanol fuel cell.

36. A liquid feed electrochemical fuel cell comprising an ion-exchange membrane of claim 29.

37. An electrochemical fuel cell according to claim 36 wherein said fuel cell is a direct methanol fuel cell.


1/2

FIG. 1

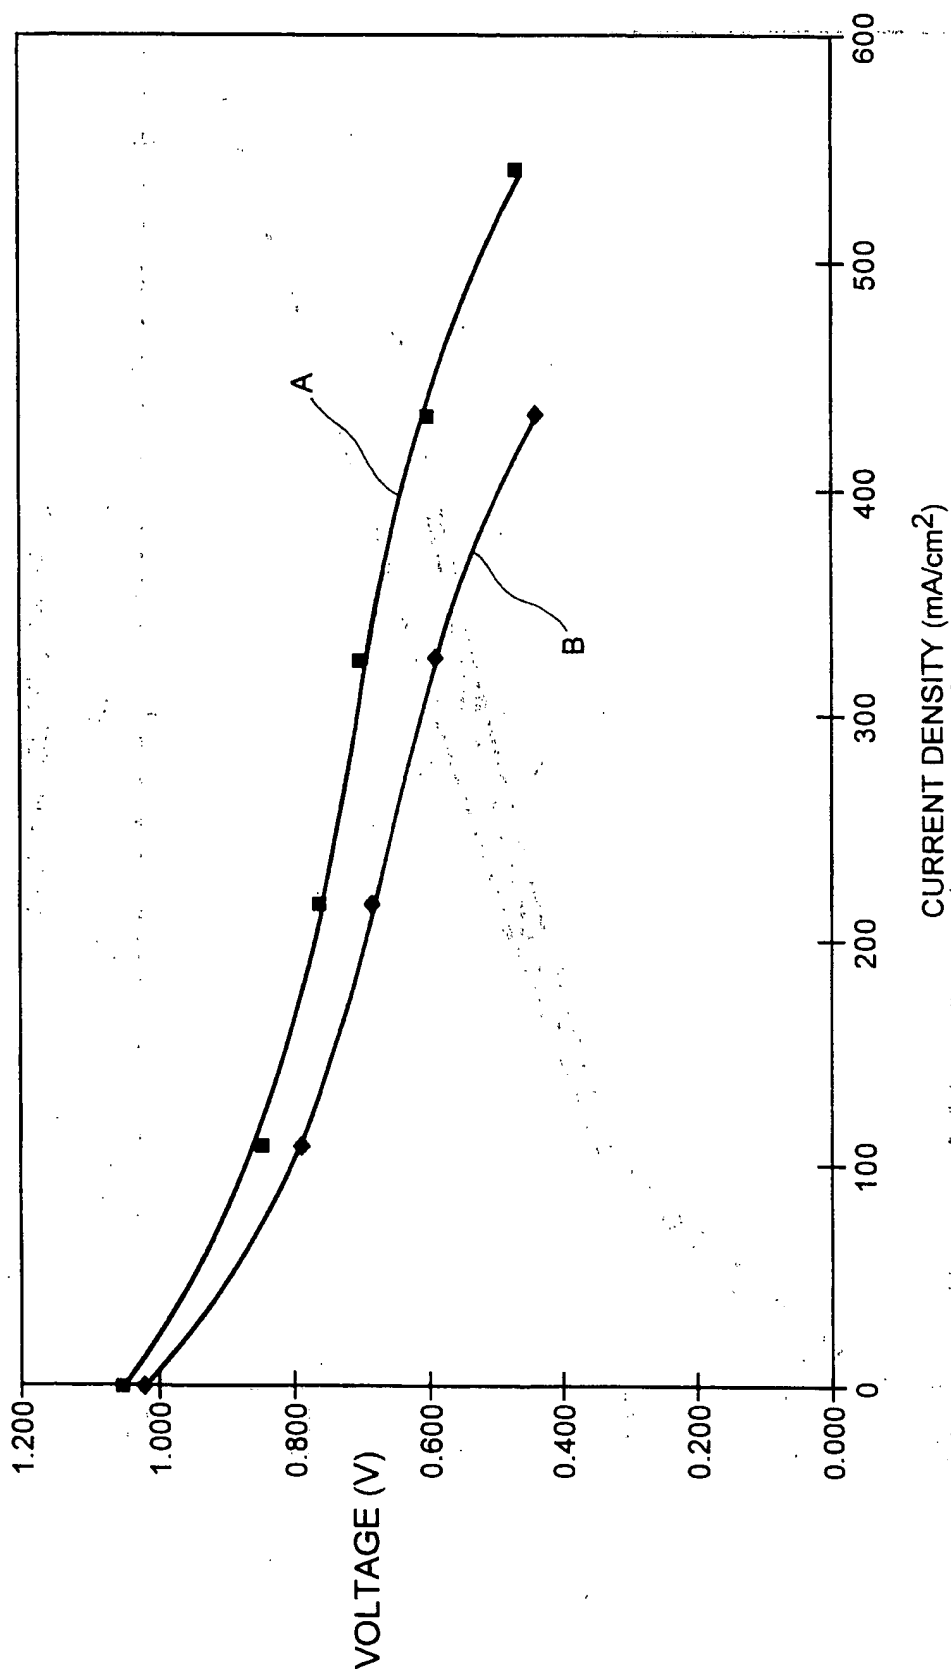

2/2

FIG. 2

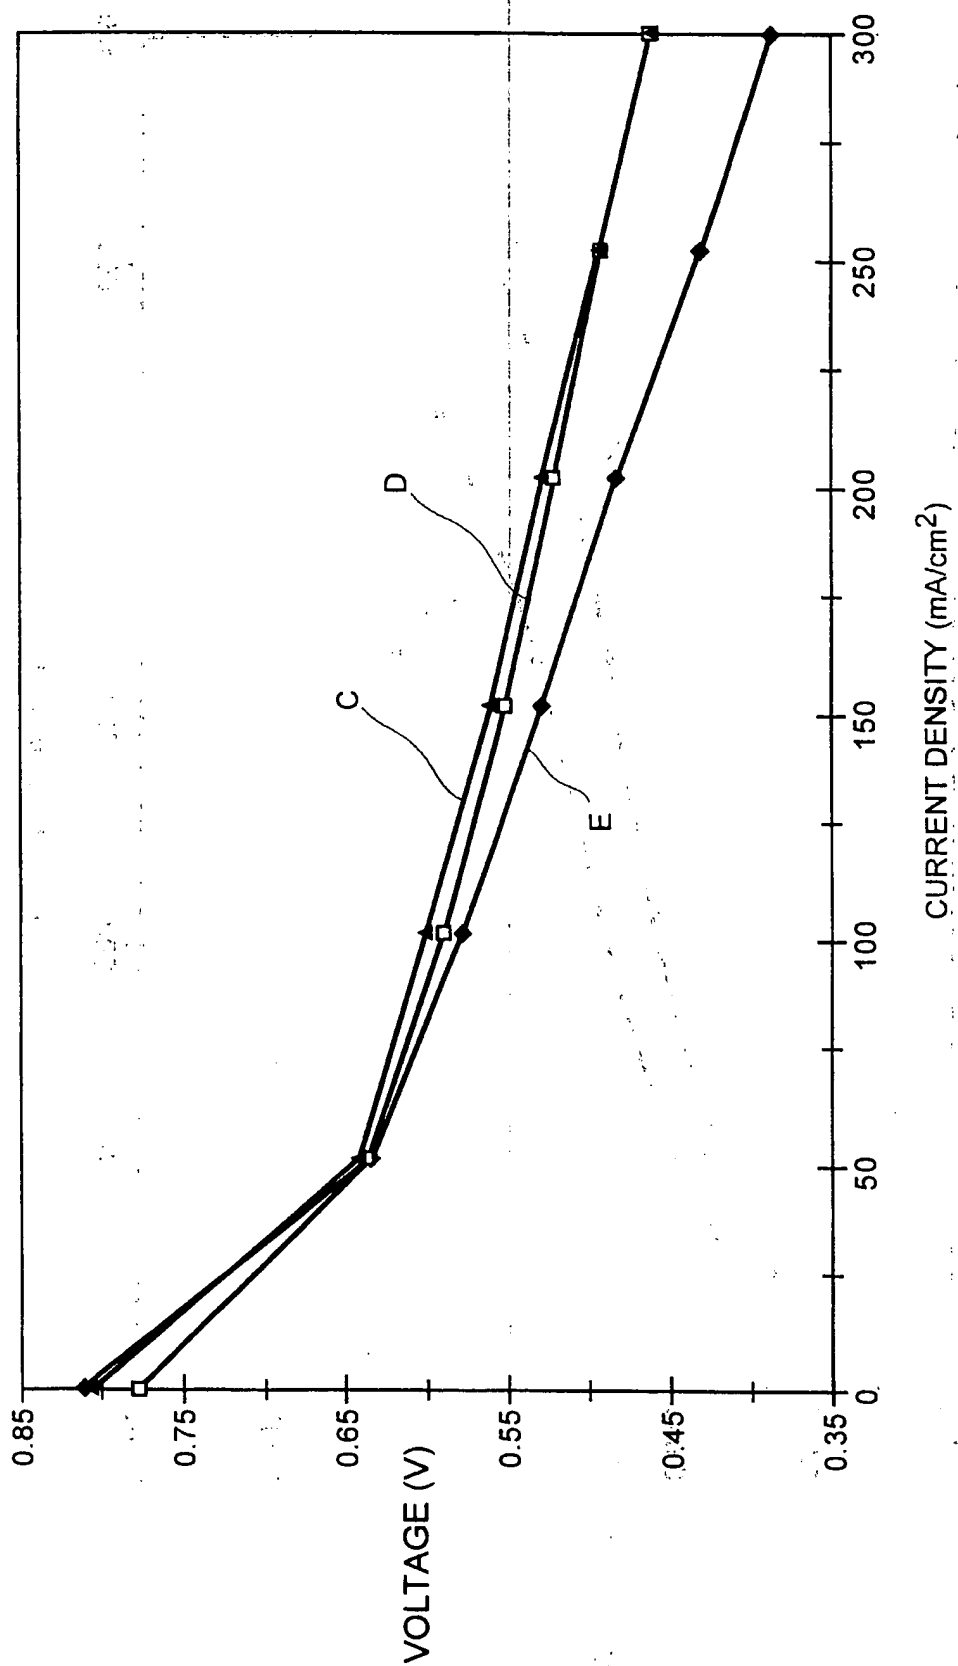

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/01041

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08J5/22 C08J7/16 C08F291/00 H01M8/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08J C08F H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 140 544 A (CHLORINE ENG CORP LTD) 8 May 1985 see claims 1,20 & US 4 605 685 A cited in the application	1-37
A	US 5 602 185 A (LOUSENBERG ROBERT D ET AL) 11 February 1997 see column 4, line 37 - column 5, line 36 see claims 2,3	1-37
A	WO 97 25369 A (BALLARD POWER SYSTEMS ;STONE CHARLES (CA); STECK ALFRED E (CA)) 17 July 1997 see claims 8,12	1-37
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed.

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 February 1999

Date of mailing of the international search report

03/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Heidenhain, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/01041

C.(Continuation)-DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 95 08581 A (BALLARD POWER SYSTEMS) 30 March 1995 see claims 1, 3, 7, 8</p>	<p>1-37</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 98/01041

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0140544 A	08-05-1985	JP 60195131 A	03-10-1985
		JP 60055033 A	29-03-1985
		JP 60110711 A	17-06-1985
		JP 60127332 A	08-07-1985
		US 4605685 A	12-08-1986
US 5602185 A	11-02-1997	US 5422411 A	06-06-1995
		AU 5889396 A	24-12-1996
		CA 2221813 A	12-12-1996
		WO 9639379 A	12-12-1996
		EP 0848702 A	24-06-1998
		US 5684192 A	04-11-1997
		US 5773480 A	30-06-1998
		AU 685503 B	22-01-1998
		AU 7649294 A	10-04-1995
		CA 2171298 A, C	30-03-1995
		WO 9508581 A	30-03-1995
		EP 0720628 A	10-07-1996
		JP 8512358 T	24-12-1996
		US 5498639 A	12-03-1996
		US 5834523 A	10-11-1998
WO 9725369 A	17-07-1997	US 5834523 A	10-11-1998
		AU 1187297 A	01-08-1997
		CA 2240495 A	17-07-1997
		EP 0882088 A	09-12-1998
WO 9508581 A	30-03-1995	US 5422411 A	06-06-1995
		AU 685503 B	22-01-1998
		AU 7649294 A	10-04-1995
		CA 2171298 A, C	30-03-1995
		EP 0720628 A	10-07-1996
		JP 8512358 T	24-12-1996
		US 5498639 A	12-03-1996
		US 5602185 A	11-02-1997
		US 5684192 A	04-11-1997
		US 5834523 A	10-11-1998
		US 5773480 A	30-06-1998